


Corrugated ESD Anti-Static Mats

Specification Sheet

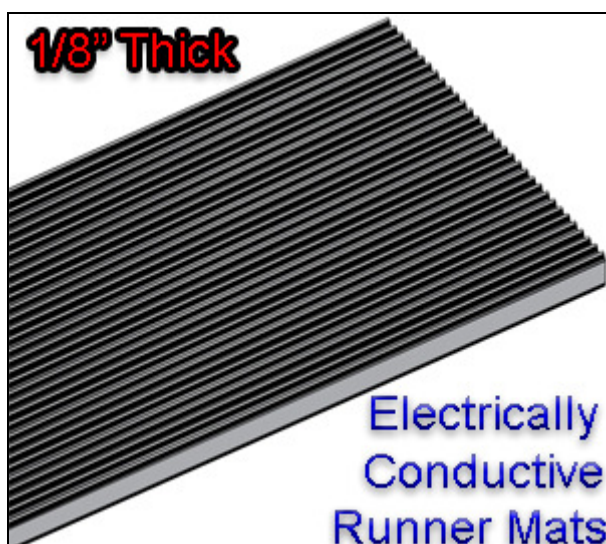

Performance	Better
Uses	Dry areas at risk for damage from static electricity
Compound	Vinyl
Coefficient of Friction	0.68 Dry per ASTM F1677
Tabor Abrasion	2% lost @ 1,000 cycles per Fed. Std. 191
Flammability	"A" Rating per MVSS 302
Warranty	1 years
Wear Resistance	4
Slip Resistance	5
Conductivity	4
MNF	65
Thickness	1/8"
Resistivity	RTT: 1×10^7 to 3×10^7 Ohms